

DECOR BASKET SYSTEM

The Decor line of lockers, gym baskets and basket racks are designed as matching pieces; ideal for Educational, Institutional, Commercial and Industrial applications.

BASKET AND BASKET RACKS SPECIFICATIONS Overall size of rack is 42" x 16 3/4" x 72" (1065mm x 425mm x 1830mm)

Basket rack shelves, frames and end panels shall be made from prime galvanized steel. Shelves shall be constructed of 20 ga. (1.0mm). The channel formed Cross Members to be constructed of 18 ga. (1.2mm) and bolted to end panels. End Panels shall be constructed of 20 ga. (1.0mm) and bolted to the shelves.

Shelves shall be numbered and have padlock hasps welded to leading edge and have 3 security baffles riveted to underside of intermediate and top shelves.

Gym baskets to be high density linear polyethylene to eliminate rusting and noise of shelves with wall thickness not less than .115" (2.9mm). Basket size to be 16 3/8" x 9 1/2" x 9 3/8" (416mm x 241 mm x 238mm). Free flow ventilation shall be 20% of sides and 16% of bottom. Baskets shall have provision for locking by means of a padlock and shall be numbered to correspond to numbers on the shelf. Color of baskets is white. Basket rack to be in durable baked enamel 633 Charcoal, shelves to be 223 Oyster.

Padlocks are extra.



Voice: 1-800-667-0677, Fax: 1-800-663-6338, E-Mail: dizard@dizard.com

SPECIFICATIONS: BASKET AND BASKET RACKS

Supply and/or install units of GSS basket racks containing 28 baskets each


- Overall size of rack is 42" x 16-3/4" x 72" [1065 mm x 425 mm x 1830 mm]

Basket rack shelves, frames and end panels shall be made from prime galvanized steel. Shelves shall be constructed of 20 gauge [1.0 mm]. The channel formed cross members shall be constructed of 18 gauge [1.2 mm] and bolted to end panels. End panels shall be constructed of 20 gauge [1.0 mm] and bolted to the shelves.

Shelves shall be numbered and shall have padlock hasps welded to leading edge and have 3 security baffles riveted to the underside of intermediate and top shelves.

Baskets to be high density linear polyethylene to eliminate rusting and noise of shelves with wall thickness not less than .115" [2.9 mm]. Basket size to be 16-3/8" x 9-1/2" x 9-3/8" [416 mm x 241 mm x 238 mm]. Free flow ventilation shall be 20% of sides and 16% of bottom. Baskets shall have provision for locking by means of a padlock and shall be numbered to correspond to numbers on the shelf. Colour of baskets is white. Basket racks to be in durable baked enamel #633 Charcoal, shelves to be 223 Oyster.

Padlocks are extra.

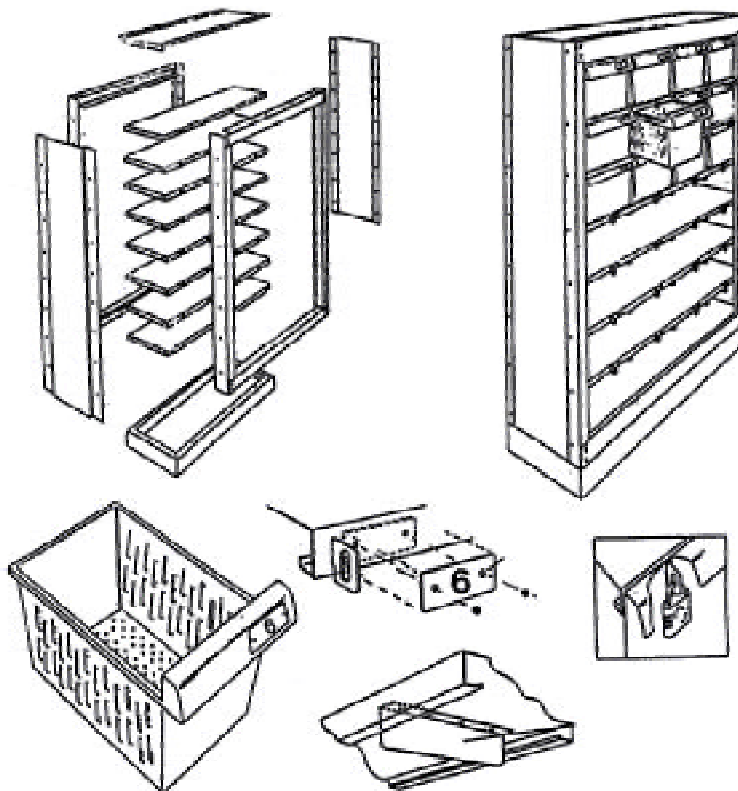

Voice: 1-800-667-0677, Fax: 1-800-663-6338, E-Mail: dizard@dizard.com